




Lightray MPX™

Lightray MPX Packaging System

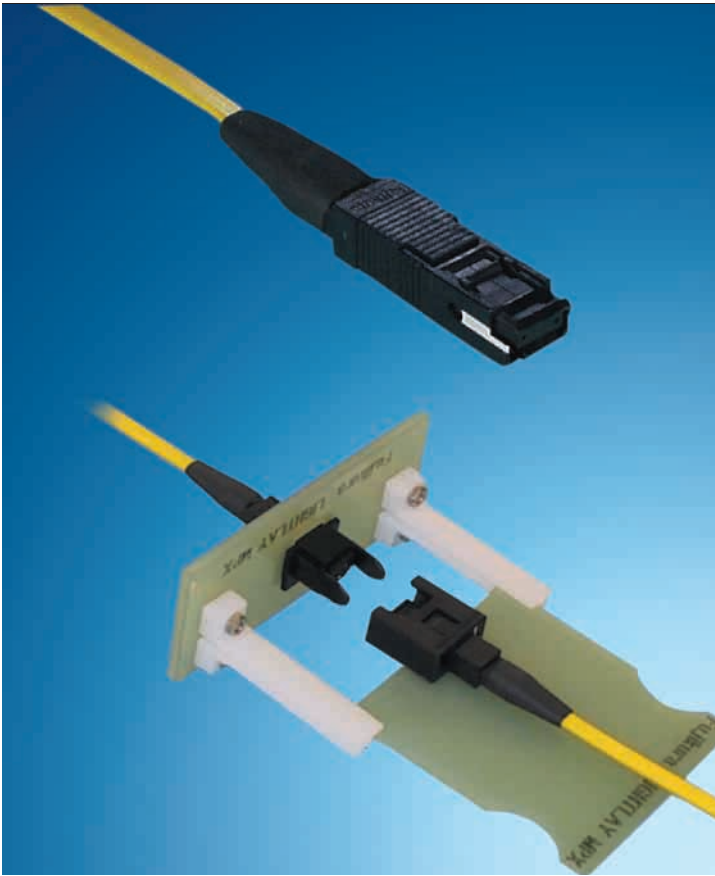

Features

- High density daughter cards to mother board optical connection
- Simple “PUSH-PULL” connection method for easy and reliable installation
- Self retentive feature eliminates stress of the connection force on the mother board
- MPX allow simultaneous packing with electric connectors in same slot
- High performance applications are a match for Fujikura's MT technology

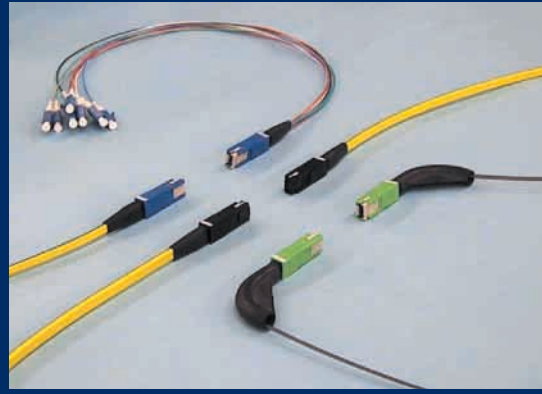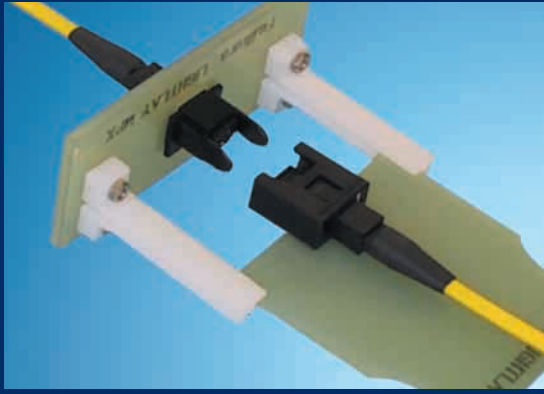


Applications

- Telecom and datacom transmission equipment
- Optical measurement components

Performance

Item	Performance	Connector	Fibre Type	Light Source
Insertion Loss	Max 1.0dB	Standard Type MPO	SM 10/125	LED, Wavelength=1.31µm
	Max 0.35dB	Low Loss Type MPX		

Fujikura LIGHTRAY MPX Packaging System

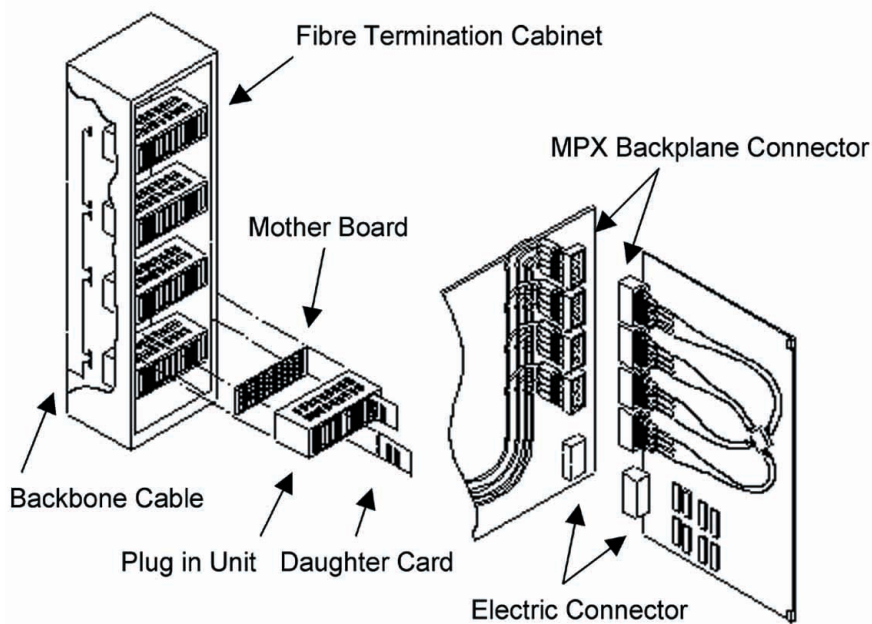

LIGHTRAY MPX IS A TRADEMARK OF THE WHITAKER CORPORATION, AN AFFILIATE OF TYCO ELECTRONICS CORPORATION.

SPECIFICATIONS AND DESCRIPTIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.